

Standard Wax Ribbon



Especially Suited for Medium Paper Printing <<


Lower Print Temperature <<

Excellent Sensitivity <<


BRW200 Is a Standard Wax Ribbon Brouwer with excellent print quality, universal media adaptability and a affordable price. Is used in the coding applications of fast growth industries including warehousing, logistics and internet sales. Todaytec's unique back coating combined with lower energy requirements extend the performance and life of the print head

• Appearance


Blackness

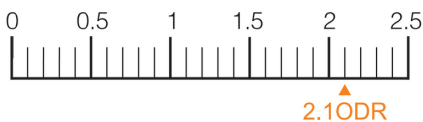


Definition



Horizontal Barcode

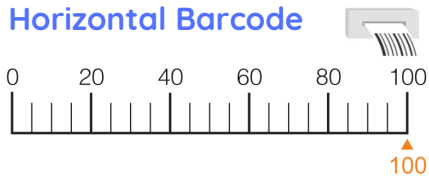


Vertical Barcode

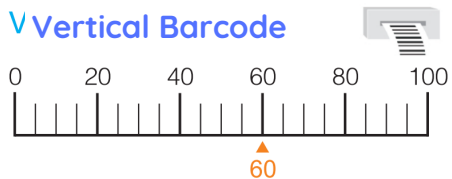


• Resistance

Abrasion Resistance

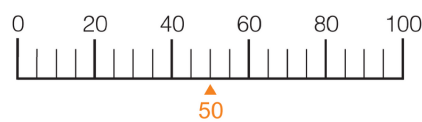


Scratch Resistance

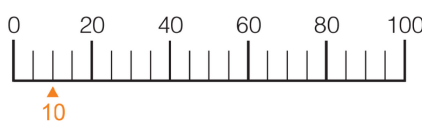


• Other Resistance

Heat Resistance

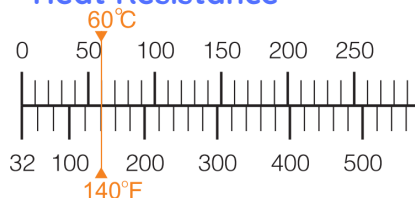


Corrosion Resistance

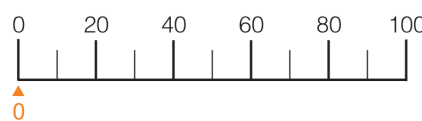

Regarding other solvent, fee to consult

• Sensitive

Printing Energy

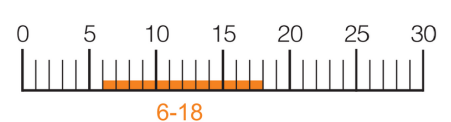

Printing Speed



• Applicable

Paper Labels (Coated paper, Hangtag, etc.)

Synthetic Material (Synthetical paper, etc.)

Film (PET, etc.)

Washing label

Standard Wax Ribbon



Parameters of Ribbon

Ink Melting Point: 105°C(221°F)

Carries: PET Film

Carrier's Thickness: 4.5 μ m

Ribbon's Thickness: < 9 μ m

Back Coating: Silicon

Coefficient of Friction: $K_c < 0.2$

Storage Conditions: 12 months

Temperatures: 5~35°C(40~95°F)

Humidity: 20~80%


Certificates and Reports

- ISO9001, ISO1401, MSDS, RoHS, SGS, SVHC
- No Halogen
- No Toxic Substances of SVHC

Recommendable fields of Application



Inventory Labels

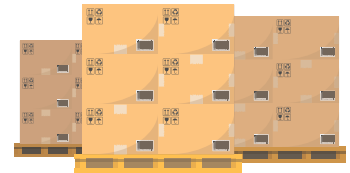

Logistic



Tickets /Bills



Food Labels



Medicare



Super Market



Tag



ID Card Copy